
VORTRAN LASER TECHNOLOGY STRADUS® 405-100

The Stradus® diode laser module is a fully integrated, plug and play, and self-contained laser module. The patented sealed optical cavity and the innovative electronics give the Stradus® laser unparalleled power stability, beam pointing stability, and low noise over time and temperature. Vortran's Graphical User Interface (GUI) software allows the user to control and monitor the module remotely via USB or RS-232.


10= . =
405 ± 5
100 (-0%, +10%)
TEM ₀₀
~1.0, ~0.6
~1.4, ~0.5
< 1.25
> 90%
< 0.5
< 5
< 5
< 0.5%
Vertical ±2°
>100:1
<0.1%
200MHz
< 2nsec
∞ (full off)
500kHz
< 0.7 μs
12V DC, 1.5A (max)
90-250 VAC,
50/60Hz
-10°C to +60°C
+10°C to +45°C
210g
Mini-USB and
RS-232
Class IIIb
Class 4
CE Mark Certified
with control box
EU and China



- Medical, Biomedical & Industrial
- Patented Sealed Optical Cavity
- Self-contained & Compact
- Excellent Beam Quality
- Low Noise
- USB or RS-232 Interface with GUI
- Analog & Digital Modulation
- OEM Head or End-user Systems

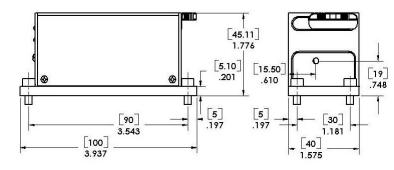

Graphical User Interface Software









Note: Specifications guaranteed only at full power